
PETTIBONE




Featuring heavy-duty lift cylinders and other rugged components, the Pettibone® Extendo™ 11578 is designed to move loads on the toughest jobsites. Superior reach, lift capacity and maneuverability combine to make the 11578 one of the most productive telehandlers on the market. Furthermore, incredible visibility from the cab and a responsive hydraulics system allow operators to work safely and efficiently at all times.

SPECIFICATIONS

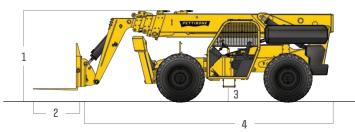

	4
DIMENSIONS	
1 Overall Height	8' (244 cm) boom down
2 Fork Carriage	48" (122 cm) standard
3 Ground Clearance	18.8" (48 cm)
4 Overall Length	24' 5" (744 cm) to fork frame
Overall Width	8' 6" (259 cm)
Pallet Forks	2.25 x 4 x 48" standard
Total Operating Weight	34,860 lbs (15,812 kg)
ENGINE	
Model/Power	117 HP (87 kW) Cummins® QSF 3.8L Tier 4 turbo diesel with electronic control & protection
DEF Tank	5 gal. (19 L)
Fuel Tank	32.6 gal. (123 L)
HYDRAULICS	
System	Pressure comp, axial piston
Features	Auxiliary boom tip hydraulics, quick disconnect for attachments
Controls	Single joystick, pilot operated
PERFORMANCE	
Max Load Capacity	11,000 lbs (4,990 kg)
Maximum Lift Height	57' (1,737 cm)
Maximum Forward Reach	42' 1" (1,283 cm) at 24" LC
Below Grade Reach	3' 11" (119 cm)
Maximum Travel Speed	20 mph (32 km/h)
Turning Radius	12' 6" (381 cm)
Frame	24° of leveling (12° right and left); rear axle stabilization system; fits under 8' doorway, outriggers
Transmission	Fully modulated Carraro® Powershift, 4-speed forward & reverse; parking brake engaged transmission declutch
Axles	Carraro outboard planetary; 4-wheel drive
Steering	4 wheel, 2 wheel and crab steer
Brakes	Oil-immersed inboard disc service brakes, integral park brake
Tires	14.00 x 24, 16 ply foam filled
Boom	Automatic fork leveling without slave cylinders; 2 wide stance, heavy-duty lift cylinders

LIFT PERFORMANCE

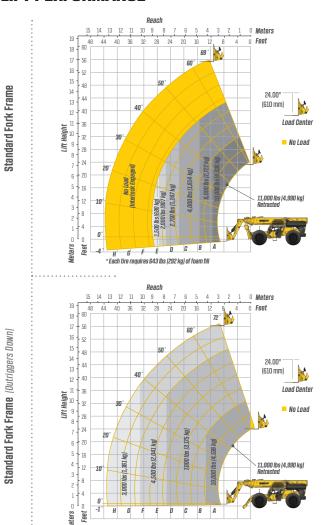

FEATURES & OPTIONS

OPERATOR CAB	
Unmatched visibility Adjustable suspension seat with seat belt	Fully adjustable right-side armrest Full set of gauges for instant machine status
AVAILABLE ATTACHMENTS	
Pallet, lumber and block forks Side tilt carriages +/- 10° Side-swing carriage	Truss boom Utility buckets
OPTIONS	
Light packages Enclosed cab (HWD)	Air-conditioned cab

* Each tire requires 643 lbs (292 kg) of foam fill



PETTIBONE, LLC

1100 Superior Avenue Baraga, MI 49908

P: 906.379.4529 info@gopettibone.com www.gopettibone.com

		WARKANIY
	1 Year	Full machine and attachment
1-2-3 WARRANTY	2 Years	Powertrain and major hydraulic components
	3 Years	Machine structure

^{*} Specifications are subject to change.