

**PETTIBONE®**


# » 736 EXTENDO

SPECIFICATIONS



The Pettibone® Extendo™ 736 telehandler provides exceptional maneuverability and productivity for a variety of load handling applications. All components of the machine are ruggedly built to maximize uptime and overall longevity. Offering excellent operator visibility for enhanced safety, the 736 also offers responsive hydraulics and simple joystick controls for efficient operation on any jobsite.

# SPECIFICATIONS

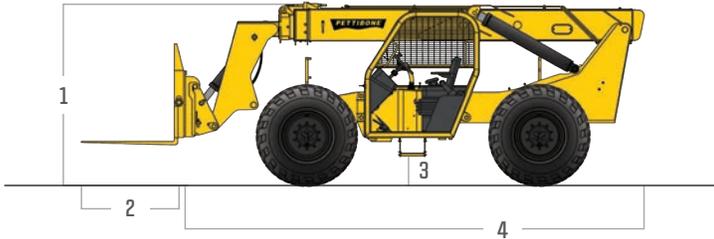


DIMENSIONS		
1	Overall Height	7' 5" (225 cm) boom down
2	Fork Carriage	48" (122 cm) standard
3	Ground Clearance	18" (46 cm)
4	Overall Length	19' 7" (597 cm) to fork frame
	Overall Width	8' 6" (259 cm)
	Pallet Forks	2 x 4 x 48" standard
	Total Operating Weight	21,720 lbs (9,852 kg)
ENGINE		
	Model/Power	110 HP (82 kW) Cummins® Tier III turbo diesel with electronic control & protection
	Fuel Tank	32.6 gal. (123 L)
HYDRAULICS		
	System	Rapid response hydraulic
	Features	Piston pump, auxiliary boom tip hydraulics, quick disconnect for attachments
	Controls	Single joystick for all boom functions

# FEATURES & OPTIONS

OPERATOR CAB	
Unmatched visibility Adjustable suspension seat with seat belt	Fully adjustable right-side armrest Full set of gauges for instant machine status
AVAILABLE ATTACHMENTS	
Pallet, lumber and block forks Side tilt carriages +/- 10°	Truss boom Utility buckets
OPTIONS	
GPS equipment management system Light packages	Foam-filled tires Enclosed cab (HWD)

# LIFT PERFORMANCE

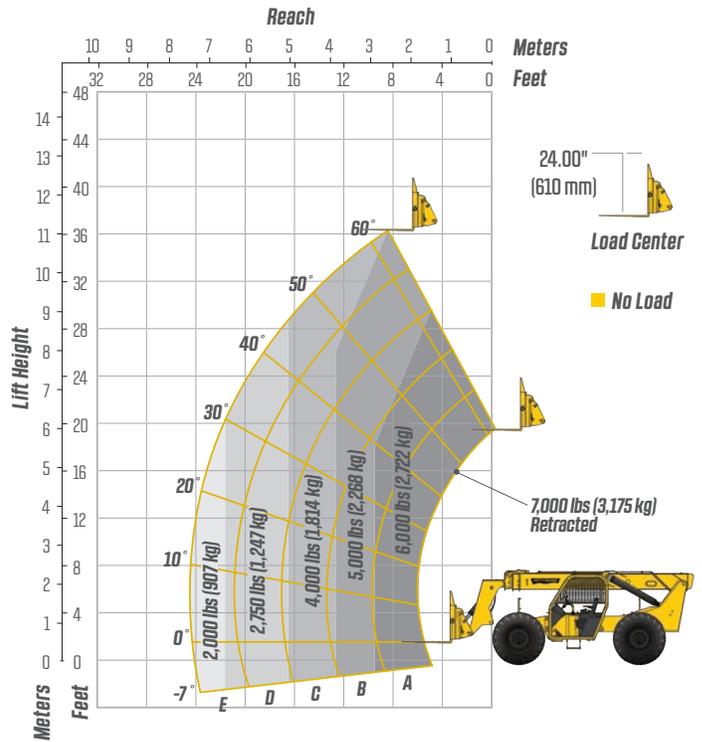

PERFORMANCE	
Max Load Capacity	7,000 lbs (3,175 kg)
Maximum Lift Height	36' (1,097 cm)
Maximum Forward Reach	24' (731 cm) at 24" LC
Below Grade Reach	3' (91 cm)
Maximum Travel Speed	20 mph (32 km/h)
Turning Radius	12' 6" (381 cm)
Frame	24° of leveling (12° right and left); fits under 8' doorway
Transmission	Fully modulated Carraro® Powershift, 4-speed forward & reverse; parking brake engaged transmission declutch
Axles	Carraro outboard planetary; 4-wheel drive
Steering	4 wheel, 2 wheel and crab steer
Brakes	Oil-immersed inboard disc service brakes, integral park brake
Tires	13.00 x 24, 14 ply
Boom	Automatic fork leveling without slave cylinders; 2 wide stance, heavy-duty lift cylinders

\* Specifications are subject to change.

**PETTIBONE®**

**PETTIBONE, LLC**  
1100 Superior Avenue  
Baraga, MI 49908  
  
P: 906.379.4529  
info@gopettibone.com  
www.gopettibone.com



WARRANTY	
1 Year	Full machine and attachment
2 Years	Powertrain and major hydraulic components
3 Years	Machine structure