


TRAVERSE T1157 SPECIFICATIONS




The Traverse™ T1157 from Pettibone® is ruggedly built and engineered to deliver results for the long haul. High lift capacity and reach, along with 70 inches of horizontal boom transfer, makes easy work of landing loads. The T1157 also offers exceptional operator visibility and superior maneuverability for enhanced efficiency. Responsive hydraulics ensure smooth operation for any job application.

SPECIFICATIONS



L .	4 —
DIMENSIONS	
1 Overall Height	8' 4" (254 cm) boom down
2 Fork Carriage	48" (122 cm) standard
3 Ground Clearance	18.8" (48 cm)
4 Overall Length	24' 5" (744 cm) to fork frame
Overall Width	8' 6" (259 cm)
Pallet Forks	2.25 x 4 x 48" standard
Total Operating Weight	37,000 lbs (16,783 kg)
ENGINE	
Model/Power	110 HP (82 kW) Cummins® Tier III turbo diesel with electronic control & protection
Fuel Tank	32.6 gal. (123 L)
HYDRAULICS	
Features	Piston pump, auxiliary boom tip hydraulics, quick disconnect for attachments
PERFORMANCE	
Max Load Capacity	11,000 lbs (4,990 kg)
Maximum Lift Height	57' 6" (1,753 cm)
Maximum Forward Reach	48' 9" (1,486 cm) at 24" LC
Below Grade Reach	3' 11" (119 cm)
Maximum Travel Speed	20 mph (32 km/h)
Turning Radius	13' (396 cm)
Transfer	5' 10" (178 cm) horizontal boom travel
Frame	24° of leveling (12° right and left); rear axle stabilization system; mounted outriggers
Transmission	Fully modulated Carraro® Powershift, 4-speed forward & reverse; parking brake engaged transmission declutch
Axles	Carraro outboard planetary; 4-wheel drive
Steering	4 wheel, 2 wheel and crab steer
Brakes	Oil-immersed inboard disc service brakes, electronically actuated spring applied hydraulic release park brake
Tires	14.00 x 24 16 ply
Boom	Automatic fork leveling without slave cylinders; 4 section roller boom

LIFT PERFORMANCE

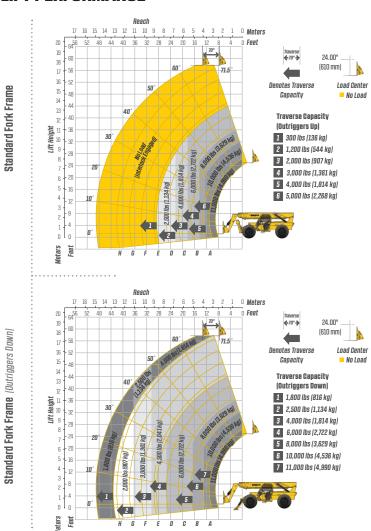

FEATURES & OPTIONS

OPERATOR CAB		
Adjustable suspension seat with seat belt Fully adjustable right-side armrest Cab step	Machine level indicator Single multifunction hydraulic joystick ROPS/FOPS	
AVAILABLE ATTACHMENTS		
Pallet, lumber and block forks Side tilt carriages +/- 10°	Truss boom Utility buckets	
OPTIONS		
Light packages Foam-filled tires	Enclosed cab (HWD)	

^{*} Specifications are subject to change.

MADDANTY



PETTIBONE, LLC

1100 Superior Avenue Baraga, MI 49908

P: 906.379.4529 info@gopettibone.com www.gopettibone.com

		WARRANIY
	1 Year	Full machine and attachment
1-2-3 WARRANTY	2 Years	Powertrain and major hydraulic components
	3 Years	Machine structure