

EXTENDO 1536_X

PETTIBONE


1536_X **EXTENDO**

The Pettibone® Extendo 1536X offers a pipe and pole baler attachment, making it ideal for pipe yards and other material handling jobs. The 1536X features a 2-section boom and user-friendly hydraulic controls, while providing a maximum lift height of 36 feet and maximum 16,000 pounds of lift capacity.

X-SERIES




SPECIFICATIONS

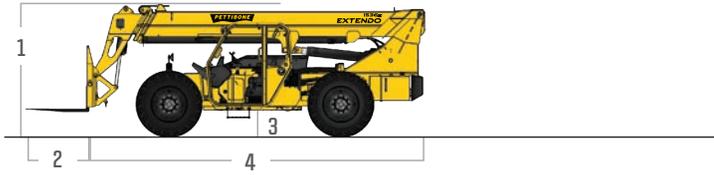


DIMENSIONS		
1	Overall Height	9' 6" (290 cm) boom down
2	Fork Carriage	72" (183 cm) standard
3	Ground Clearance	20" (51 cm)
4	Overall Length	23' 11" (729 cm) to fork frame
	Overall Width	8' 6" (259 cm)
	Pallet Forks	2.25x6x72" standard
	Curb Weight	30,000 lbs (13,608 kg) with foam-filled tires
ENGINE		
	Model/Power	120 HP (89.5 kW) Deutz® TCD 3.6 Tier 4 Final diesel with DEF and SCR aftertreatment
	DEF Tank	5 gal. (19 L)
	Fuel Tank	30 gal. (114 L)
HYDRAULICS		
	System	Pressure comp, axial piston pump
	Features	Fully proportional functions, auxiliary boom tip hydraulics, quick disconnect for attachments
	Controls	Single joystick, pilot operated
PERFORMANCE		
	Max Load Capacity	16,000 lbs (7,257 kg) 14,700 lbs (6,667 kg) with baler attachment
	Maximum Lift Height	36' (1,098 cm)
	Landing Height	32' (975 cm)
	Maximum Forward Reach	18' 3" (556 cm)
	Below Grade Reach	9" (23 cm)
	Maximum Travel Speed	15.2 mph (24.5 km/h)
	Turning Radius	15' 5" (470 cm)
	Drawbar Pull (GVW)	29,000 lbs (13,154 kg)
	Frame	20° of leveling (10° right and left), rear axle stabilization system
	Transmission	Dana® VDT2000 Series, 3-speed Powershift, forward & reverse
	Axles	Dana 223 Series: 4-wheel drive, 45% limited slip front differential
	Steering	4 wheel, 2 wheel, and crab steer
	Brakes	Oil-immersed inboard disc service brakes, integral front SAHR park brake
	Tires	14.00 x 24, 16 ply, G2 tread foam standard
	Boom	2-section, slide pad; automatic fork leveling without slave cylinder

LIFT PERFORMANCE

Standard 72" Fork Frame

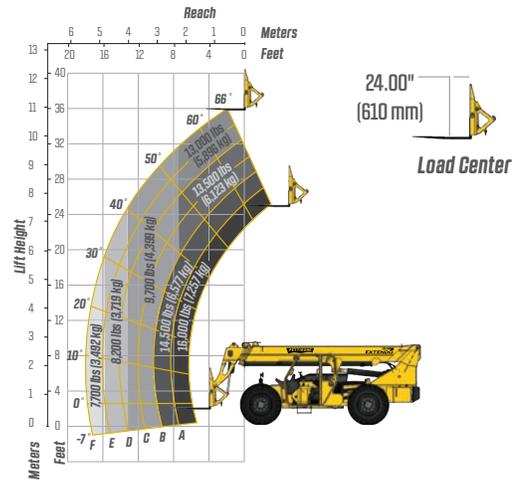

Pipe & Pole Baler

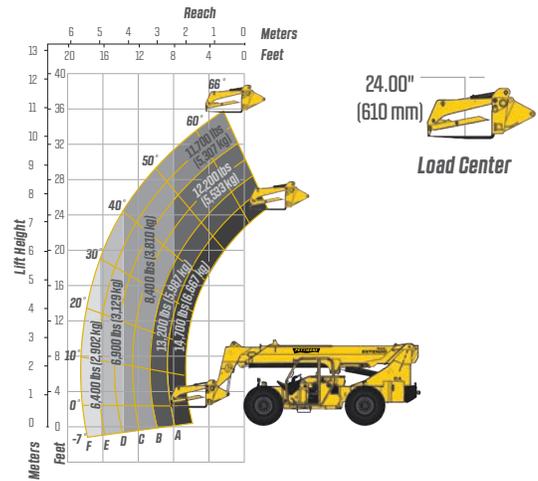

FEATURES & OPTIONS

OPERATOR CAB

X-Command® telematics	Split door design
Adjustable suspension seat with seat belt	Flat, bolt-in glass
Single multifunction hydraulic joystick	Lockable storage area under seat
Analog/LCD gauge cluster	

AVAILABLE ATTACHMENTS

Pallet, lumber or block forks	Standard carriage
Utility bucket	Hydraulic fork positioning carriage
Side tilt carriage (+/- 10°)	Pipe and pole baler
Truss boom	

OPTIONS

Premium gauge cluster w/7" digital display	Enclosed cab, HWD (A/C available)
Rear-view camera system	Sling hook
High output LED lighting package	Bolt-on rear pintle hitch
Solid tires	117 HP Cummins® diesel engine w/ SCR & DEF
Various tire tread options available	

* Specifications are subject to change.

PETTIBONE®

PETTIBONE, LLC

1100 Superior Avenue
Baraga, MI 49908

P: 906.379.4529
info@gopettibone.com
www.gopettibone.com

**2 - 5
WARRANTY**

2 Years/2,000 Hours : Bumper-to-bumper
5 Years/5,000 Hours : Machine structure

WARRANTY